


IMPEX

1811 Deerhaven Lane
Paducah, KY, 42001
USA

Flexiskirt Worksheet

Please fill in the blanks:

Return completed form to Impex

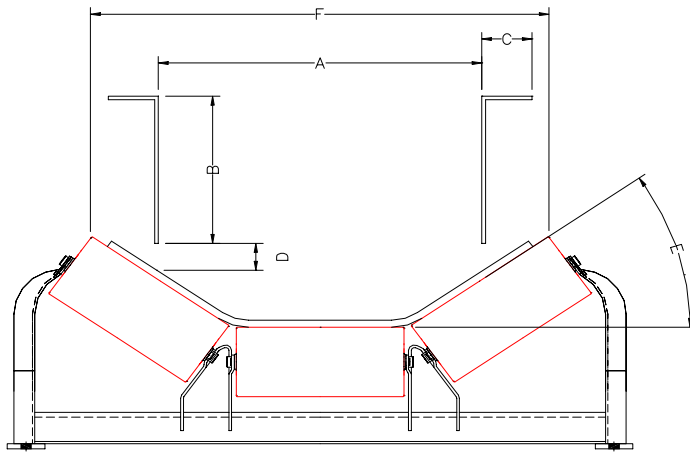

Belt Width: _____
Material Conveyed _____
Material size _____
Belt speed _____
Reversing Belt yes _____ no _____

Troughing Angle _____
Length of Transition point _____

Length of non-transition point _____

Length of skirting-Left side _____

Length of skirting-Right side _____

Flexiskirt Thickness 1/2 _____ 3/8 _____
Non Grooved _____

Grooved- one side _____
Grooved-two side _____

Type of rollers and dimensions: _____
Dimensions:
A: _____ B: _____ C: _____
D: _____ E: _____ F: _____

Note:
Reversing belts only can use non-grooved skirting
Must have at least 3 inch on each side of smooth belting for Seal lip.